
WB1-10000 0.1g

Multiple weighing units

Double TARE key



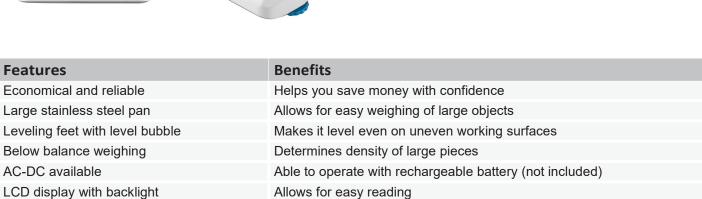

Allows for flexibility of weighing

Easy for work to operate

Model	WB1-10000
Draft Shield	No Draft Shield
Capacity	10kg
Resolution	0.1 g
Repeatability	± 0.1 g
Linearity Error	± 0.1 g
Response Time	≤2 sec
Calibration	Calibration with External Weight
Weighing Units	g, ct, lb, oz, ozt, dwt, kg, tmR, GSM, PKT etc(17 units)
Construction	Cast aluminum, static resistant ABS, stainless steel pan
Display	Large, easy to read LCD display with backlight
Pan Size	Square Pan,192 x 171mm
Body dim.	304x 204 x 90 mm
Battery	Rechargeable battery
Power	110v - 240v, 50HZ / 60HZ
Operational Temp.	10 °C to 40 °C
Connectivity	Configurable RS 232 interface