


WB2-500 0.001g

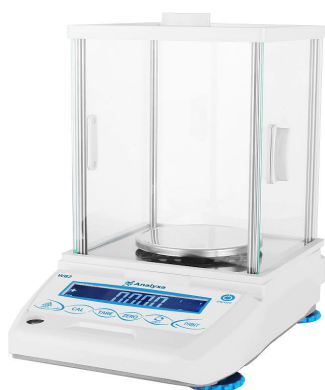

VATN High Contrast LCD Display

Features	Benefits
Efficient filtering-out of vibrations	High stability and reliability
Legendary High Contrast Black LCD screen	Ensures clear readings in any areas
3-Door Anti-Static Draft Shield	Protect weighing samples from surrounding influences
Large stainless steel pan	Allows for easy weighing of large objects
Leveling feet with 4 points of adjustment	Makes it level even on uneven working surfaces
Below balance weighing	Determines density of large pieces
Configurable RS 232 interface	Allows for communication w/ peripheral data collection and printing
Multiple weighing units (21 total)	Allows for flexibility of weighing

Model	WB2-500
Capacity	500g
Resolution	0.001 g (1 mg)
Repeatability	±0.002 g (2 mg)
Linearity Error	± 0.002 g (2 mg)
Response Time	≤ 2 sec
Calibration	Calibration with External Weight
Weighing Units	g, lb, kg, oz, ct, ozt, pcs, tls, tIT, tIH, dwt, GN (grain), dr, mom units
Construction	Cast aluminum, static resistant ABS, static-resistant doors, stainless steel pan
Display	Large, easy to read LCD display with backlight and icons
Pan Size	115mm
Body dimension	304 x 204 x 300 mm (L x W x H)
Battery	Rechargeable battery 6V 2.8A
Power	110v - 240v, 50HZ / 60HZ
Operational Temp.	10 °C to 40 °C
Connectivity	Configurable RS 232 interface